



## Series RMT


The Athena Series RMT is a microprocessor-based, dual-zone temperature controller specifically designed for runnerless molding applications effectively doubling the zone count per module without doubling the price.

It features two easy-to-use operator keypads, four LED displays, and discrete indicators for heat output, alarm, degree F/C indication, manual and closed loop mode.

- s Accepts Type J thermocouple
- s Bumpless auto/manual transfer
- s CompuStep® bake out feature prevents moisture at startup
- s Built-in loop break for open heater, shorted triac, reversed or shorted thermocouple
- s Open thermocouple break protection with jumper-selectable shutdown or average power output based on operation
- s Preset alarms at 30°F (17°C)
- s SafeChange™ “hot swap” feature allows safe removal and replacement of module
- s 15 amps per zone



### Ordering Information

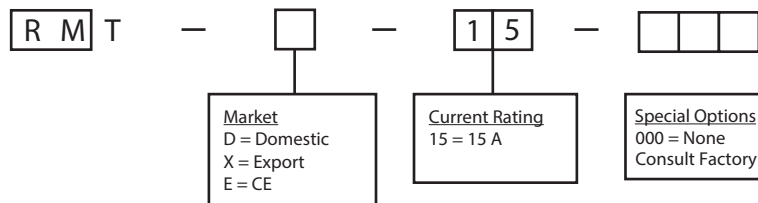

# Technical Specifications

---

## Performance Specifications

---

Auto Control Mode	CompuCycle® system
Control Accuracy	±0.1°F (±0.1°C) dependent on the total thermal system
Ambient Temperature	32°F to 130°F (0°C to 55°C)
Temperature Stability	±0.5% of full scale over the ambient range of 32°F to 130°F (0°C to 55°C)
Calibration Accuracy	Better than 0.2% of full scale
Power Response Time	Better than 200 ms
Process Sampling	100 ms (nominal)
CompuStep® System Control Mode	Variable stepping voltage, phase angle fired
CompuStep® System Duration	Approximately 5 min
CompuStep® System Output Percent	Steps approximately 4% of input voltage
CompuStep® System Override Temperature	200°F (93°C)
Error Mode Response	a. T/C open, T/C reverse, T/C shorted and Loop Break overrides Auto mode/CompuStep® b. Manual mode overrides T/C open, T/C reverse

## Input Specifications

---

Thermocouple (T/C) Sensor	Type "J" or "K" grounded or ungrounded (dip switch selectable)
External T/C Resistance	Maximum 100 ohms for rated accuracy
T/C Isolation	Isolated from ground and supply voltages
Cold Junction Compensation	Automatic, better than 0.02°F/°F (0.01°C/°C)
Input Type	Potentiometric
Input Impedance	10 megohms
Input Protection	Diode clamp, RC filter
Input Amplifier Stability	Better than 0.05°F/°F (0.03°C/°C)
Input Dynamic Range	Greater than 999°F (537°C)
Common Mode Rejection Ratio	Greater than 100 dB
Power Supply Rejection Ratio	Greater than 70 dB

## Output Specifications

---

Voltages	240 Vac nominal, single phase 120 Vac available
Power Capability	15 amperes, 3600 watts @ 240 Vac per two zones
Overload Protection	Triac and load use fast-blow fuses. Both control legs are fused (ABC) Optional: High Speed Fuse (GBB)
Power Line Isolation	Optically and transformer isolated from ac lines. Isolation voltage is greater than 2500 volts.
Output Drive	Internal solid state triac, triggered by ac zero crossing pulses

## Controls and Indicators

---

Set Point Control	Precision 3 digit pushbutton switch, Direct Reading, Range: 0 to 999°F (535°C) Resolution: 1°F (1°C)
Accuracy:	better than 0.5°F (0.3°C)
Range	0 to 999°F (535°C)
Resolution	1°F (1°C)
Display Top	3-digit filtered LED
Display Bottom	3-digit filtered LED
Status Indicators	Heat Output Alarm °F/°C SoftStart CompuStep® Mode Indication
Power On-Off	Rocker Switch, UL, CSA, and VDE approved

## Electrical Power Specifications

---

Input Voltage	95-265 Vac
Frequency	50 Hz ± 3 Hz, 60 Hz ± 3 Hz
DC Power Supplies	Internally generated, regulated, and temperature compensated
Module Power Usage	Less than 3 watts, excluding load



Athena Controls, Inc.  
5145 Campus Drive • Plymouth Meeting, PA 19462-1129 USA  
Toll-Free: 1.800.782.6776 • Tel: 610.828.2490  
Fax: 610.828.7084 • Email: sales@athenacontrols.com  
[www.athenacontrols.com](http://www.athenacontrols.com)